



FBR20-30SZ

SPEC SHEET

2000-3000kg

SZ Series

Stand-on Moving
Mast Reach Truck

FBR20-30SZ

Features

1 EXCELLENT ERGONOMICS

The design is centred around enhanced comfort and intuitive operation. The operator compartment has been carefully designed to maximise efficiency, while reducing strain and fatigue on the driver, resulting in improved load handling and increased overall productivity.

2 EFFICIENT ELECTRIC CONTROLS

The inclusion of an AC induction traction motor, controlled by Field Effect Transistor (FET) inverter, enables smooth, step-less acceleration and deceleration. In addition, this technology provides powerful regenerative braking, to reduce wear and prolong brake service life. Inching control is also optimised, when lifting and lowering, due to the AC motor and large low-speed range of the lift valve.

3 IMPRESSIVE MANOEUVRABILITY

A combination of factors including power-on-demand steering, small diameter steering wheel and increased aisle space - when turning or stacking - using the Aisle Width Control technology; allow the truck to excel in tight spaces with limited driver effort.



Overview


The Yale® FBR20-30SZ range has been designed central to your business and operator's needs:

DESIGN

- Simple and efficient to use
- Greater control and manoeuvrability
- Comfortable and intuitive to operate
- Additional driver safety features and alerts
- Comprehensive display
- Fast and easy to service
- Maximised productivity
- Low cost of ownership

THE RANGE

- Available in three different capacities:
- FBR20SZ – 2,000 Kg
 - FBR25SZ – 2,500 Kg
 - FBR30SZ – 3,000 Kg

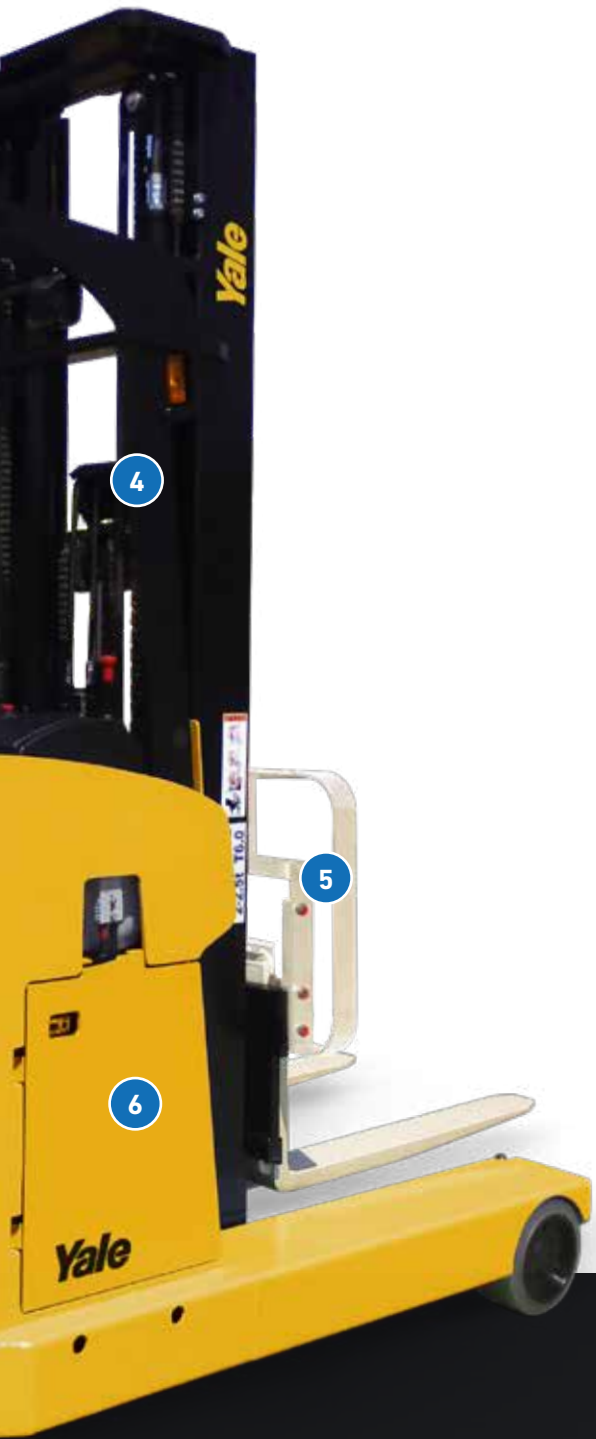

4 RELIABLE, PRODUCTIVE & EFFICIENT

The use of high quality and robust components, help deliver a reliable operation, with limited wear and tear. The inclusion of the AC motor, turning control function and newly designed hydraulic equipment enable energy efficiency and up-time to be maximised. A superb suspension system also allows for faster work cycles and greater productivity.

5 OPTIMUM CONTROL ON CORNERS & SLOPES

Torque in the drive motor is carefully controlled to maintain appropriate cornering speeds. Thus, improving stability on corners, while contributing to energy efficiency, by limiting the operator's ability to accelerate excessively. Moreover, the truck can maintain a constant speed on downward slopes, when in the neutral position.

6 OPERATIONAL ALERTS

The machine produces a buzzing sound to warn the operator if they accelerate, brake or turn too suddenly. The point at which the operational alerts are engaged can be adjusted to suit each individual application; maintaining efficiency on all site types, whilst limiting poor driver practices.

LOW COST OF OWNERSHIP

The use of high quality and robust components within the range deliver a reliable operation with limited wear and tear. The trucks have been designed to maximise uptime, delivering high productivity, while remaining economically and environmentally efficient. Maintenance costs and requirements are further reduced by simple, readily available, cost effective replacement parts. Additionally, serviceable parts have been designed to allow for fast and easy access.

COLD STORE PROTECTION OPTIONS


- ❄ Cold store freeze proof options
 - Minus 35°C or 45°C
- ❄ Fishery cold storage option
 - Minus 35°C

SPECIFICATIONS

DISTINGUISHING MARK	1.1	Manufacturer		YALE		
	1.2	Model designation		FBR20SZ	FBR25SZ	FBR30SZ
	1.5	Rated capacity	Kg	2000	2500	3000
	1.4	Operator Type		Stand	Stand	Stand
	1.6	Load center	mm	500	500	500
	1.9	Wheelbase	Y (mm)	1525	1700	1800
WEIGHT	2.1	Unladen Weight	Kg	2960	3010	3200
	2.2	Axle loading (reach in), unladen front/rear	Kg	960 / 2000	910 / 2100	995 / 2270
	2.3	Axle loading (reach out), unladen front/rear	Kg	1300 / 1660	1225 / 1785	1405 / 1860
TYRES/CHASSIS	3.1	Tyre Type		Solid	Solid	Solid
	3.2	Tyre size, front		267 x 114U	267 x 135U	267 x 135U
	3.3	Tyre size, rear		394 x 152R	394 x 152R	394 x 152R
	3.4	Caster size		204 x 74R	204 x 74R	204 x 74U
	3.5	Number of wheels, front / drive / caster		2/1/02	2/1/02	2/1/02
	3.6	Tread, front	b10 (mm)	1080	1075	1075
	3.7	Tread, rear	b11 (mm)	725	725	725
DIMENSIONS	4.1	Tilt of mast / fork carriage, forward α / back β	degrees	3 / 5	3 / 5	3 / 5
	4.2	Height of mast, lowered	$\eta 1$ ($\mu\mu$)	1995	1995	2020
	4.3	Free lift	h2 (mm)	150	150	155
	4.4	Lift height	h3 (mm)	3000	3000	3000
	4.5	Height of mast, extended	h4 (mm)	3950	3950	3955
	4.7	Height to top of overhead guard	h6 (mm)	2270	2270	2270
	4.19	Overall length (with forks)	l1 (mm)	2210	2210	2310
	4.2	Length to face of forks	l2 (mm)	1290	1290	1392
		Length to top of outrigger	l3 (mm)	1915	2090	2190
	4.21	Overall width	b1 (mm)	1190	1210	1210
		Outrigger width	b2 (mm)	1190*	1190*	1230
	4.22	Fork dimensions	s / e / l (mm)	40 / 122 / 920	40 / 122 / 920	45 / 122 / 920
	4.23	Fork carriage (hook)	Fork carriage DIN 15173, Class, A / B	2A	2A	3A
	4.24	Fork carriage width	b3 (mm)	838	838	838
	4.25	Distance between fork-arms min / max	b5 (mm)	250 / 780	250 / 780	250 / 780
	4.28	Stroke (Reach distance)	l4 (mm)	665	840	840
		Height Outrigger	h7 (mm)	290	290	290
	4.32	Ground clearance at centre of wheelbase	m2 (mm)	90	90	90
	4.35	Turning radius	Wa (mm)	1775	1950	2045
		Front overhang	S (mm)	190	190	190
4.33	Minimum right-angled aisle width	L1100 x W1100 pallet	1810	1900	1950	
4.34	Right-angled stacking aisle width	L1100 x W1100 pallet	2760	2760	2850	
4.42	Step height	K (mm)	320	320	320	
PERFORMANCE DATA	5.1	Travel speed laden / unladen	km / h	9 / 9.5	9 / 9.5	9 / 9.5
	5.2	Lifting speed laden / unladen	m / s	0.315 / 0.5	0.295 / 0.5	0.245 / 0.415
	5.3	Lowering speed laden / unladen	m / s	0.51 / 0.56	0.51 / 0.56	0.54 / 0.49
	5.7	Gradeability, laden / unladen @ 1.5 km/h	%	13 / 23	13 / 23	11 / 23
	5.10	Service brake, mechanical / hydraulic / electric / pneumatic		Mechanical	Mechanical	Mechanical
		Foot / hand / deadman brake		Deadman	Deadman	Deadman
ENGINE		Drive motor control output		FET inverter	FET inverter	FET inverter
	6.1	Rated output (60 min rating)	kW	5.2	5.2	5.2
		Hoist motor control method		FET inverter	FET inverter	FET inverter
	6.2	Rated output (5 min rating)	kW	9.6	9.6	9.6
	6.4	Battery voltage / nominal capacity K5	(V) / (Ah)	48 / 312	48 / 312	48 / 370
	6.5	Battery weight	kg	520	520	585
		Steering motor control output		FET chopper	FET chopper	FET chopper
6.6	Rated output (60 min rating)	kW	0.3	0.3	0.3	

*Note: Outrigger width (b2) is 1340 mm for 6500-8000 mm masts

DIMENSIONS

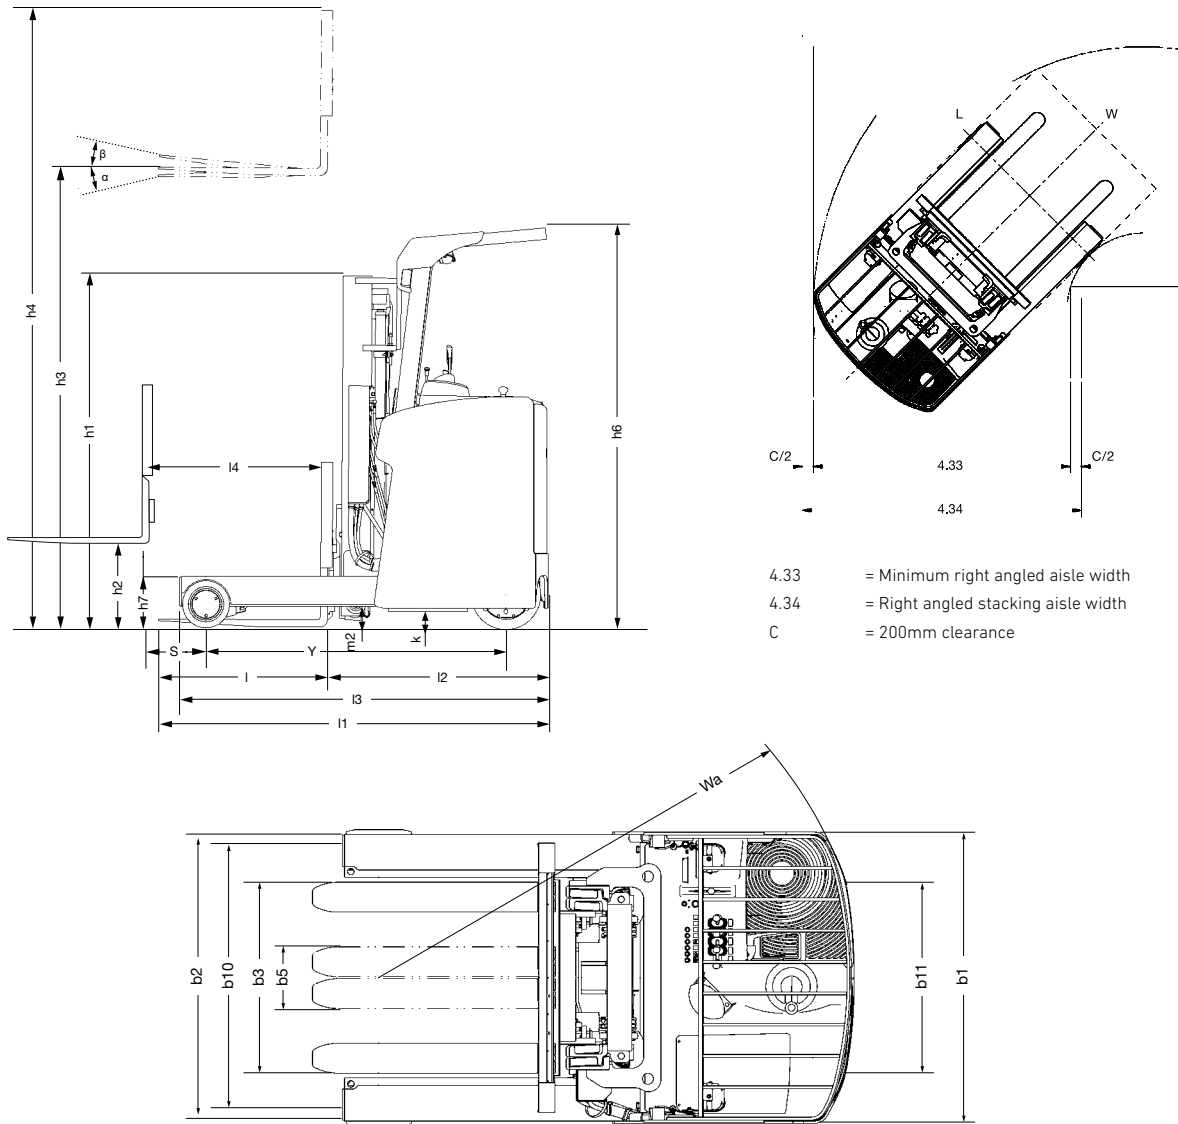

AISLE WIDTH, PALLET LENGTH: L, PALLET WIDTH: W (MM)
THIS TABLE BELOW INDICATES THE VALUE DURING AWC (SMALL TURNING RADIUS CONTROL) STACKING MODE

Model	Mast	Battery	Intersecting (IA) and Right-angle aisle width					Right-angle stacking (SA) aisle width**						
			L	800	1,000	1,000	1,000	1,100	L	800	1,000	1,000	1,000	1,100
			W	1,100	1,000	1,000	1,200	1,100	W	1,100	1,000	1,000	1,200	1,100
FBR20SZ	2 STG LFL	*312/370Ah	1,800	1,800	1,810	1,820	1,810	2,300	2,450	2,470	2,490	2,560		
		440Ah	1,800	1,800	1,810	1,830	1,820	2,380	2,530	2,550	2,580	2,650		
		476Ah	1,800	1,800	1,810	1,830	1,820	2,380	2,530	2,550	2,580	2,650		
	3 STG FFL	*312/370Ah	1,800	1,800	1,810	1,830	1,820	2,380	2,530	2,550	2,580	2,650		
		440Ah	1,800	1,800	1,810	1,830	1,820	2,380	2,530	2,550	2,580	2,650		
		476Ah	1,800	1,800	1,810	1,830	1,820	2,400	2,560	2,580	2,600	2,670		
FB18PZ	2 STG LFL	*312/370Ah	1,890	1,890	1,900	1,910	1,900	2,320	2,450	2,470	2,500	2,560		
		440Ah	1,900	1,890	1,900	1,910	1,910	2,380	2,530	2,550	2,580	2,650		
		476Ah	1,900	1,890	1,900	1,910	1,910	2,380	2,530	2,550	2,580	2,650		
	3 STG FFL	*312/370/440Ah	1,900	1,890	1,900	1,910	1,910	2,380	2,530	2,550	2,580	2,650		
		476Ah	1,900	1,890	1,900	1,920	1,910	2,410	2,560	2,580	2,600	2,670		
FB20PZ	2 STG LFL	*370/440/476Ah	1,950	1,940	1,950	1,960	1,950	2,400	2,540	2,560	2,590	2,650		
	3 STG FFL	*370/440/476Ah	2,100	2,100	2,110	2,120	2,120	2,470	2,630	2,650	2,670	2,740		

* Standard model ** the aisle width is for loading work at right angles regulated by the JIS D 6202

Features

OPERATOR COMPARTMENT OVERVIEW

- Low step height, 320 mm
 - Reduces driver fatigue when stepping on and off the truck
- Unique suspension system
 - Parallel link structure with suspension lock mechanism, helps to deliver smooth, stable and comfortable driving conditions
- Formed rubber floor mat
 - Aids operator comfort by isolating the driver from unwanted noise and vibration
- Adjustable hip support, high back support and moulded elbow pad to optimise driver comfort
- Comprehensive LCD full function display with programmable input options and anti-glare visor
 - Digital clock, odometer, hour meter, parking brake status, battery discharge indicator, password entry for 10 ID's, 3 user selectable performance modes and real time service diagnostics

DESIGNED FOR SAFETY

- Operator Presence System (OPS)
 - Both travel and load handling operations are disabled when the driver vacates the operator compartment, to help prevent unauthorised operation
- Wide outrigger, for improved stability on the high lift mast
- Robust overhead guard provides protection from falling inventory

OPTIONAL FEATURES

- Charging control options
 - Auto, reverse and equalising charging
- Solenoid disk brake with anti-skid and traction control
- Non-marking solid and urethane tyre options
- Multiple light configuration options
 - Rotating LED amber (with high or low mounting)
 - Working lights, Blue lights, safety laser
- Multiple fishery and cold store options
- Optional front wheel brake anti skid control
 - If the drive tyres were to slip, the front wheel brakes would assist, this control prevents the tyres from locking, in addition to providing maximum brake force




ERGONOMIC OPERATOR COMPARTMENT & INTUITIVE CONTROLS

MAST AND CAPACITY INFORMATION

MAST TYPE	Max fork height (mm)	Lowered height (mm)	Overall Extended Height	Free lift	Capacity (kg)			
					@ 500mm LC	@ 600mm LC	@ 500mm LC	@ 600mm LC
					FBR20SZ		FBR25SZ	
2 STG LFL	2,545	1,995	3,450	150	2,000	1,750	2,500	2,190
	2,745	1,995	3,650	150	2,000	1,750	2,500	2,190
	3,045	1,995	3,950	150	2,000	1,750	2,500	2,190
	3,345	2,170	4,250	150	2,000	1,750	2,500	2,190
	3,545	2,270	4,450	150	2,000	1,750	2,500	2,190
	3,745	2,420	4,650	150	2,000	1,750	2,500	2,190
	4,045	2,620	4,950	150	2,000	1,750	2,500	2,190
	4,345	2,770	5,250	150	1,950	1,700	2,450	2,140
	4,545	2,870	5,450	150	1,900	1,660	2,400	2,100
	5,045	3,120	5,950	150	1,850	1,620	2,300	2,010
3 STG FFL	3,830	1,870	4,735	970	2,000	1,740	2,500	2,180
	4,130	1,970	5,035	1,070	2,000	1,740	2,500	2,180
	4,340	2,040	5,245	1,140	1,900	1,660	2,400	2,100
	4,580	2,120	5,485	1,220	1,800	1,570	2,300	2,010
	5,030	2,270	5,935	1,370	1,700	1,480	2,200	1,920
	5,330	2,370	6,235	1,470	1,650	1,440	2,150	1,880
	5,680	2,520	6,585	1,620	1,600	1,390	2,050	1,790
	6,030	2,720	6,935	1,820	1,500	1,310	1,900	1,660
	6,500	2,950	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ
	7,000	3,115	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ
	7,500	3,280	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ
	8,000	3,450	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ	Ⓟ

MAST TYPE	Max fork height (mm)	Lowered height (mm)	Overall Extended Height	Free lift	Capacity (kg)	
					@ 500mm LC	@ 600mm LC
					FBR30SZ	
2 STG LFL	2,550	2,020	3,455	155	3,000	2,620
	2,750	2,020	3,655	155	3,000	2,620
	3,050	2,020	3,955	155	3,000	2,620
	3,350	2,170	4,255	155	3,000	2,620
	3,550	2,270	4,455	155	3,000	2,620
	3,750	2,420	4,655	155	3,000	2,620
	4,050	2,620	4,955	155	3,000	2,620
	4,350	2,770	5,255	155	2,950	2,580
	4,550	2,870	5,455	155	2,900	2,540
	5,050	3,120	5,955	155	2,800	2,450
3 STG FFL	3,820	1,870	4,725	925	3,000	2,620
	4,120	1,970	5,025	1,025	3,000	2,620
	4,330	2,040	5,235	1,095	3,000	2,620
	4,570	2,120	5,475	1,175	2,950	2,580
	5,020	2,370	5,925	1,425	2,700	2,360
	5,320	2,520	6,225	1,575	2,600	2,270
	5,720	2,720	6,625	1,775	2,200	1,920
	6,020	2,870	6,925	1,925	2,100	1,840

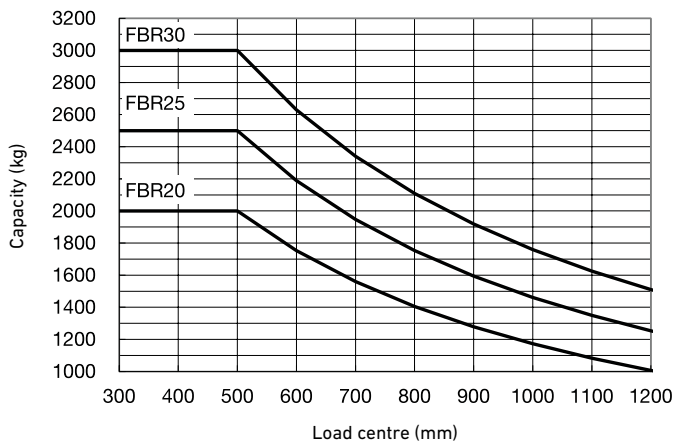

All masts have 3 degrees forward tilt and 5 degrees backward tilt

1. MFH: Maximum Fork Height (MFH) shown with the load. Add 5mm without load
2. OLH: Overall Lowered Height (OLH) includes Free Lift
3. OEH: Overall Extended Height (OEH) shown with standard 900 mm load backrest and without load
4. FL: Free Lift (FL)
5. Capacity (kg) with standard carriage

	Cold Storage		Fishery Cold Storage
	-35 deg	-45 deg	-35 deg
Additional front axle seal	✗	✗	✓
Anti-cold rust proof paint	✓	✓	✓
Anti-cold Hyd oil (T15)	✓	✓	✓
Anti-cold Hoses	✗	✓	✗

About Yale



Yale Lift Truck Technologies leverages over a century of material handling experience and substantial investment in innovation to bring the most advanced technology-driven lift truck solutions to market. The company offers a full line of award-winning lift trucks, including reach trucks, order pickers, turret trucks, pallet jacks and trucks, pallet stackers, tow tractors and counterbalanced forklifts, as well as powerful operator assist solutions, proven robotics and a wide range of power sources to help customers adapt to today's demanding supply chain. Yale and its independent dealer network support these solutions with comprehensive after-sales service, parts, financing and training.

Yale Lift Truck Technologies is a trading name of Hyster-Yale Asia-Pacific Pty Ltd., a wholly owned subsidiary of Hyster-Yale Materials Handling, Inc. (NYSE:HY) which is headquartered in Cleveland, Ohio and operates globally.

MATERIALS HANDLING FOR:

3PL

Auto Parts Distribution

Beverage

Cold & Frozen Foods

Food Distribution

Food Processing

Furniture & Furnishings

Government

Health & Pharma

Home Centers

Retail & E-commerce

Yale Pacific

1/23 Rowood Road, Prospect NSW 2148


Tel: +61 (2) 9795 3800 | Fax: +61 (2) 9792 8484

Yale Asia

16 Tuas Avenue 20, Singapore 638827

Tel: +65 6863 3387 | Fax: +65 6863 3349

yale.com

© 2023 Hyster-Yale Group, Inc., all rights reserved. YALE and  are trademarks of Hyster-Yale Group, Inc. Trucks may be shown with optional equipment and/or features not available in all regions. Specifications and details in this brochure are subject to change without prior notification.